


PAGINA DI CONFIGURAZIONE

BELKIN SURF N300

1

Aprire il proprio browser (es. Internet Explorer) e digitare l'indirizzo HTTP://192.168.0.1 accedere alla pagina di configurazione del modem router.

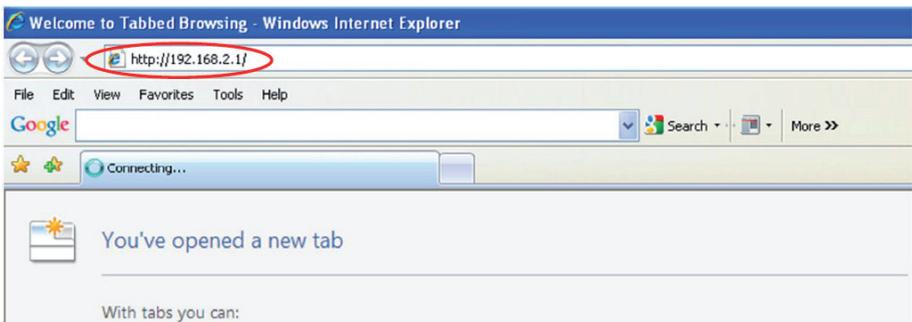

Prima di avviare la configurazione si visualizzerà la seguente pagina

The image shows the 'Router Setup' page for a Belkin router. The page has a dark sidebar on the left with navigation links such as LAN Setup, WAN Settings, Internet WAN, and Firewall. The main content area is titled 'Router Setup' and includes a 'Status' section with a message: 'You will need to log in before you can change any settings.' Below this, there are several configuration tables:

LAN Settings	
Current Language	English
Available Languages	English Français Deutsch Nederlands Español Italiano 简体中文 繁體中文 日本語 한국어
LAN Settings	
LAN/WLAN MAC	08-9E-38-57-30-50
IP Address	192.168.2.1
Subnet Mask	255.255.255.0
DHCP Server	Enabled

Internet Settings	
WAN MAC Address	08-9E-38-57-30-51
Connection Type	Dynamic
DHCP IP	NULL
Subnet Mask	NULL
Default Gateway	NULL
DNS Address	NULL

Firewall	
Firewall Settings	Enabled
SMB	block 0/0
Security	WPA/WPA2-Personal (PSK)
UPnP	Enabled
Remote Management	Disabled
UPS	Enabled

DSL	
Type	Interface Path
Status	SHOWTIME
	Downstream Upstream
Data rate(Mbps)	2047.2 1079
Usage Margin	27 20
Output power(dBm)	0 8
Attenuation(dB)	0 0

E' possibile procedere alla configurazione necessaria per l'attestazione dell'apparato alla rete accedendo alla pagina Internet WAN.

BELKIN® Router Setup

- LAN Setup
- LAN Settings
- DHCP Client List
- Internet WAN**
- Connection Type
- DNS
- MAC Address
- Wireless
- Channel and SSID
- Security
- Wi-Fi Protected Setup
- Use as an Access Point
- Firewall
- Virtual Servers
- MAC Address Filtering

Status

You will need to log in before you can change any settings.

Language	
Current Language	English
Available Languages	English Français Deutsch Nederlands Español Italiano 简体中文 繁體中文 日本語 한국어

Version Info	
Firmware Version	1.00.46(Aug 22 2011 16:02:00)
Boot Version	V1.06
Hardware	F9J1002 v1 (01)
Serial No.	121131HC104469

LAN Settings	
LAN/WLAN MAC	08:86:3B:57:30:50
IP Address	192.168.2.1
Subnet Mask	255.255.255.0
DHCP Server	Enabled

Nella schermata in cui è richiesta l'autenticazione, è sufficiente cliccare sul tasto Submit senza digitare alcuna password.

BELKIN® Router Setup

- LAN Setup
- LAN Settings
- DHCP Client List
- Internet WAN**
- Connection Type
- DNS
- MAC Address
- Wireless
- Channel and SSID
- Security
- Wi-Fi Protected Setup
- Use as an Access Point
- Firewall
- Virtual Servers
- MAC Address Filtering


Login

Before you can change any settings, you need to login with a password. If you have not yet set a custom password, then leave this field blank and click "Submit".

Password

Default = leave blank

Si accede alla finestra di riepilogo delle tipologie di connessioni supportate dall'apparato. Cliccare su Connection Type

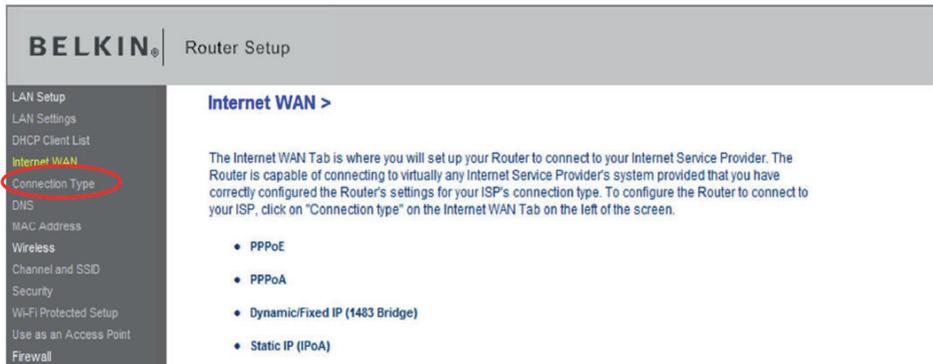

BELKIN Router Setup


LAN Setup
LAN Settings
DHCP Client List
Internet WAN
Connection Type
DNS
MAC Address
Wireless
Channel and SSID
Security
Wi-Fi Protected Setup
Use as an Access Point
Firewall

Internet WAN >

The Internet WAN Tab is where you will set up your Router to connect to your Internet Service Provider. The Router is capable of connecting to virtually any Internet Service Provider's system provided that you have correctly configured the Router's settings for your ISP's connection type. To configure the Router to connect to your ISP, click on "Connection type" on the Internet WAN Tab on the left of the screen.

- PPPoE
- PPPoA
- **Dynamic/Fixed IP (1483 Bridge)**
- Static IP (IPoA)

Scegliere l'opzione Dynamic/Fixed IP (1483 Bridge) e proseguire cliccando su Next

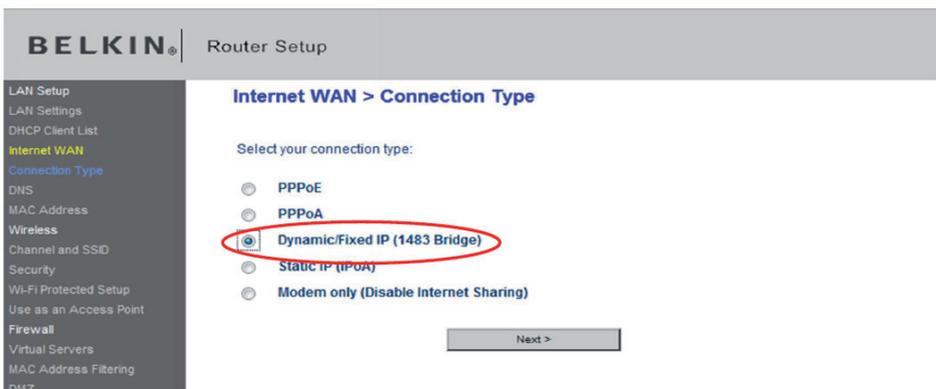

BELKIN Router Setup

LAN Setup
LAN Settings
DHCP Client List
Internet WAN
Connection Type
DNS
MAC Address
Wireless
Channel and SSID
Security
Wi-Fi Protected Setup
Use as an Access Point
Firewall
Virtual Servers
MAC Address Filtering
DMZ

Internet WAN > Connection Type

Select your connection type:

- PPPoE
- PPPoA
- Dynamic/Fixed IP (1483 Bridge)**
- Static IP (IPoA)
- Modem only (Disable Internet Sharing)

Next >

Modificare solo i valori di VPI/VCI

- VPI: 8
- VCI: 36

lasciando inalterate le opzioni

- IP assigned by ISP: Yes
- Encapsulation: LLC

BELKIN® Router Setup

LAN Setup
LAN Settings
DHCP Client List
Internet WAN
Connection Type
DNS
MAC Address
Wireless
Channel and SSID
Security
Wi-Fi Protected Setup
Use as an Access Point
Firewall
Virtual Servers
MAC Address Filtering
DMZ

Internet WAN > Connection Type > Dynamic/Fixed IP (1483 Bridge)

To enter your Dynamic IP settings, type in your information below and click "Apply changes". [More Info](#)

IP assigned by ISP > Yes ▾

Use static Default Gateway:

Default Gateway > 0 0 0 0

VPI/VCI > 8 / 36

Encapsulation > LLC ▾

Clear Changes Apply Changes

Confermare le impostazioni cliccando su Apply Changes e attendere la loro applicazione

BELKIN® Router Setup

Internet WAN > Connection Type > Dynamic/Fixed IP (1483 Bridge)

Applying changes. Please wait.....

22 seconds remaining.

L'apparato è connesso correttamente alla rete FASTWEB quando il campo Internet Status, posto sulla destra di ciascuna pagina, diventa Connected.

Router Setup

Home | Help | Logout **Internet Status: Connected**

Internet WAN > Connection Type > Dynamic/Fixed IP (1483 Bridge)

To enter your Dynamic IP settings, type in your information below and click "Apply changes". [More info](#)

IP assigned by ISP > Yes ▾

Use static Default Gateway:

Default Gateway > 0 0 0 0

VPI/VCI > 8 / 36

Encapsulation > LLC ▾

Clear Changes Apply Changes

Per visualizzare l'indirizzo assegnato dal server di rete al modem router cliccare su Home. Gli indirizzi riportati nello screenshot sono esempi puramente indicativi.

BELKIN Router Setup

LAN Setup
 LAN Settings
 DHCP Client List
 Internet WAN
 Connection Type
 DNS
 MAC Address
 Wireless
 Channel and SSID
 Security
 MAC Protected Setup
 Use as an Access Point
 Firewall
 Virtual Servers
 MAC Address Filtering
 DMZ
 DDNS
 WAN Ring Blocking
 Security Log
 Utilities
 Restart Router
 Restore Factory Defaults
 Save/Backup Settings
 Restore Previous Settings
 Firmware Update
 System Settings
 Self Healing

Status

Language

Current Language	English
Available Languages	English Franais Deutsch Nederlands Espaol Italiano 简体中文 繁體中文 日本語 한국어

Version Info

Firmware Version	1.00.48(Aug 22 2011 16:02:00)
Boot Version	V1.05
Hardware	F721002 V1 (01)
Serial No.	12113HC104469

Internet Settings

WAN MAC Address	08:98:36:57:30:51
Connection Type	Dynamic
WAN IP	93.48.112.182
Subnet Mask	255.255.255.0
Default Gateway	93.48.112.184
DNS Address	62.101.93.101

ADSL

Type	Interleave Path
Status	SHOWTIME
	Downstream Upstream
Data rate(Kbps)	20474 1019
Noise Margin	17 19
Output power(dBm)	9 8
Attenuation(dB)	0 0

LAN Settings

LAN/WLAN MAC	08:98:36:57:30:50
IP Address	192.168.2.1
Subnet Mask	255.255.255.0
DHCP Server	Enabled

Features

Firewall Settings	Enabled
SSID	belkin_020
Security	WPA/WPA2-Personal (PSK)
UPnP	Enabled
Remote Management	Disabled
VPS	Enabled

2 CONFIGURAZIONE TRAMITE CD DI INSTALLAZIONE

Inserire il CD ed installare il programma di configurazione in esso contenuto. Al termine dell'installazione si apre la seguente pagina. Cliccare su **STRUMENTI AVANZATI**.

Belkin Setup


BELKIN Setup

Connessione

Strumenti avanzati


Manuale utente Uscire

Si accede alla seguente pagina

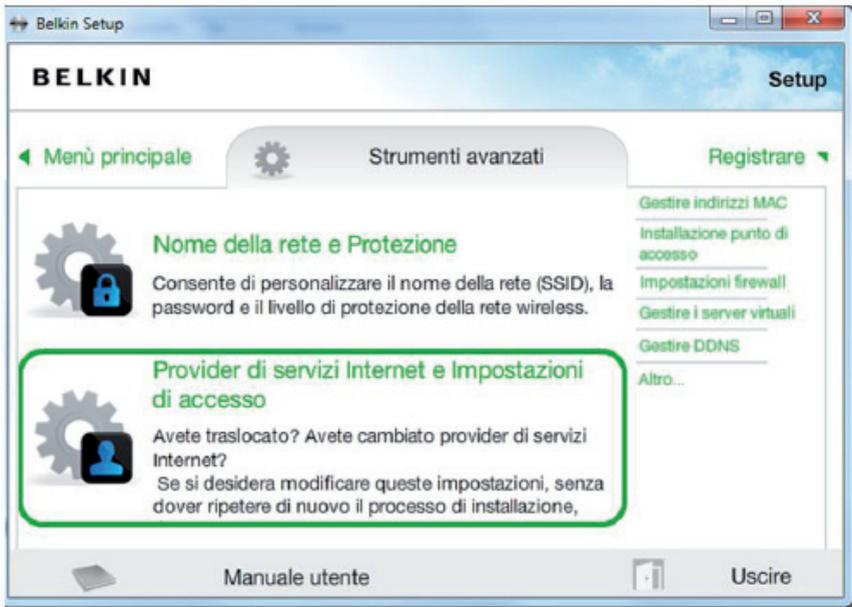


Cliccando su Provider di servizi Internet ed Impostazioni di accesso si avvia il browser e si accede alla pagina web di configurazione dell'apparato.


Nella schermata in cui è richiesta l'autenticazione, è sufficiente cliccare sul tasto Submit senza digitare alcuna password

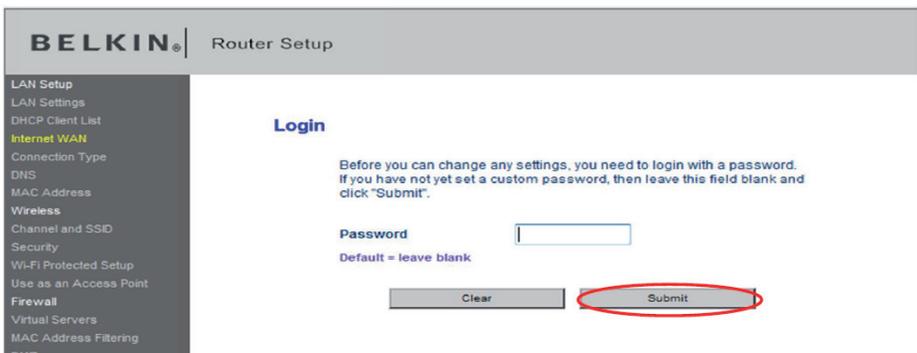

Si accede alla finestra di riepilogo delle tipologie di connessioni supportate dall'apparato. Cliccare su Connection Type

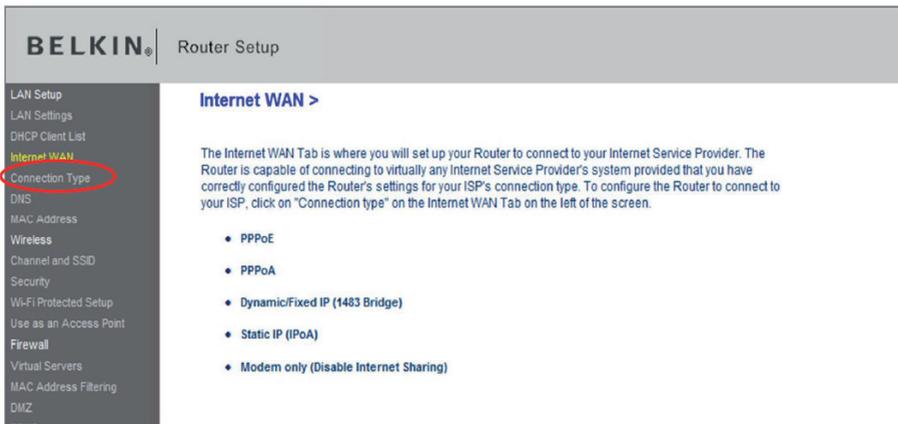

Scegliere l'opzione Dynamic/Fixed IP (1483 Bridge) e proseguire cliccando su Next

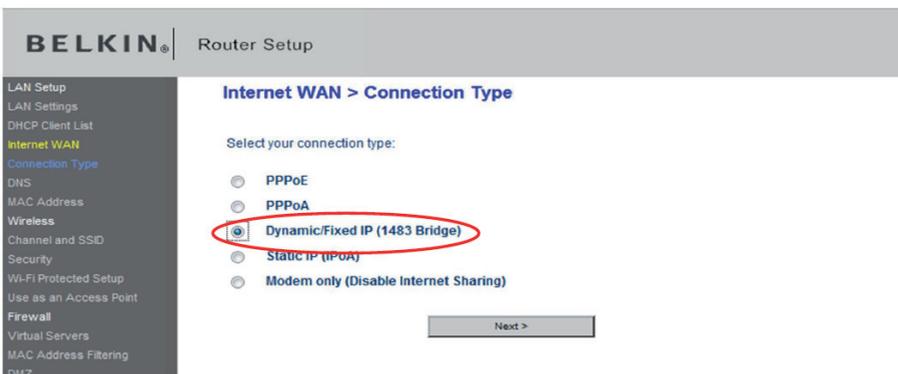

Nella schermata successiva, modificare solo i valori di VPI/VCI

- VPI: 8
- VCI: 36

lasciando inalterate le opzioni

- IP assigned by ISP: Yes
- Encapsulation: LLC

BELKIN Router Setup

LAN Setup
LAN Settings
DHCP Client List
Internet WAN
Connection Type
DNS
MAC Address
Wireless
Channel and SSID
Security
Wi-Fi Protected Setup
Use as an Access Point
Firewall
Virtual Servers
MAC Address Filtering
DMZ

Internet WAN > Connection Type > Dynamic/Fixed IP (1483 Bridge)

To enter your Dynamic IP settings, type in your information below and click "Apply changes". [More Info](#)

IP assigned by ISP > Yes ▾

Use static Default Gateway:

Default Gateway > 0 0 0 0

VP/VC > 8 / 36

Encapsulation > LLC ▾

Clear Changes Apply Changes

Confermare le impostazioni cliccando su Apply Changes e attendere la loro applicazione

BELKIN Router Setup

LAN Setup
LAN Settings
DHCP Client List
Internet WAN
Connection Type
DNS
MAC Address
Wireless
Channel and SSID
Security
Wi-Fi Protected Setup
Use as an Access Point

Internet WAN > Connection Type > Dynamic/Fixed IP (1483 Bridge)

Applying changes. Please wait.....

22 seconds remaining.

L'apparato è connesso correttamente alla rete FASTWEB quando nel campo Internet Status, posto sulla destra di ciascuna pagina, diventa Connected

Router Setup Home | Help | Logout | **Internet Status: Connected**

Internet WAN > Connection Type > Dynamic/Fixed IP (1483 Bridge)

To enter your Dynamic IP settings, type in your information below and click "Apply changes". [More Info](#)

IP assigned by ISP > Yes ▾

Use static Default Gateway:

Default Gateway > 0 0 0 0

VP/VC > 8 / 36

Encapsulation > LLC ▾

Clear Changes Apply Changes

Per visualizzare l'indirizzo assegnato dal server di rete al modem router cliccare su Home. Gli indirizzi riportati nello screenshot sono esempi puramente indicativi

BELKIN Router Setup

LAN Setup
 LAN Settings
 DHCP Client List
Internet WAN
 Connection Type
 DNS
 MAC Address
Wireless
 Channel and SSID
 Security
 Wi-Fi Protected Setup
 Use as an Access Point
Firewall
 Virtual Servers
 MAC Address Filtering
 DMZ
 DDNS
 WAN Ping Blocking
 Security Log
Utilities
 Restore Router
 Restore Factory Defaults
 Search/Backup Settings
 Restore Previous Settings
 Firmware Update
 System Settings
 Self Healing

Status

Language

Current Language	English
Available Languages	English Français Deutsch Nederlands Español Italiano 繁體中文 繁體中文 日本語 한국어

Version Info

Firmware Version	1.00.46(Aug 22 2011 16:02:00)
Boot Version	V1.06
Hardware	F9J1002 v1 (01)
Serial No.	121131HC104469

Internet Settings

WAN MAC Address	08.86.3B.57.30.51
Connection Type	Dynamic
WAN IP	93.48.112.182
Subnet Mask	255.255.255.0
Default Gateway	93.48.112.184
DNS Address	62.101.93.101

ADSL

Type	Interleave Path
Status	SHOWTIME
Data rate(Kbps)	Downstream 1019 Upstream 20474
Noise Margin	17 19
Output power(dBm)	0 8
Attenuation(dB)	0 6

LAN Settings

LAN/WLAN MAC	08.86.3B.57.30.50
IP Address	192.168.2.1
Subnet Mask	255.255.255.0
DHCP Server	Enabled

Features

Firewall Settings	Enabled
SSID	belkin_DSO
Security	WPA/WPA2-Personal (PSK)
UDPv6	Enabled
Remote Management	Disabled
WPS	Enabled

2 VERIFICARE LA VERSIONE FIRMWARE

Per verificare la versione del firmware dell'apparato cliccare su Home

BELKIN Router Setup

LAN Setup
 LAN Settings
 DHCP Client List
Internet WAN
 Connection Type
 DNS
 MAC Address
Wireless
 Channel and SSID
 Security
 Wi-Fi Protected Setup
 Use as an Access Point
Firewall
 Virtual Servers
 MAC Address Filtering
 DMZ
 DDNS

Status

Language

Current Language	English
Available Languages	English Français Deutsch Nederlands Español Italiano 繁體中文 繁體中文 日本語 한국어

Version Info

Firmware Version	1.00.46(Aug 22 2011 16:02:00)
Boot Version	V1.06
Hardware	F9J1002 v1 (01)
Serial No.	121131HC104469

Internet Settings

WAN MAC Address	08.86.3B.57:30:51
-----------------	-------------------

LAN Settings

LAN/WLAN MAC	08.86.3B.57.30.50
IP Address	192.168.2.1
Subnet Mask	255.255.255.0
DHCP Server	Enabled

Features

Firewall Settings	Enabled
-------------------	---------

FASTWEB
 un passo avanti